MUNICH

microPrism™

IP65



EN

Minimalist sealed IP & Fire Rated ultra-shallow downlight. Clean contemporary and compact ingress-proof luminaire.

FR

Downlight plat IP et coupe-feu. Luminaire résistant à la pénétration, contemporain et compact

ES

Downlight plano IP e ignífugo. Luminaria resistente a la penetración, contemporánea y compacta

Product colour code

- 01	- 02	- 03	- 05	- 06
Black RAL 9011	Dark Grey RAL 7043	White RAL 9003	Matt Silver RAL 9006	Bronze RAL 6014

Special finishes upon request

- SU01	- SU02	- SU03	- SU04	- SW01	- SW02	- SW03
Concrete Urban	Softscape Urban	Stone Urban	Corten Urban	Oak Woodland	Walnut Woodland	Pine Woodland



Automobile association of singapore, Singapore

Luminaire structure

EN

- Die-cast aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Remote driver (included) is not IP-rated
- Fire Rated 30 or 60 minutes
- 0dB Acoustic Rated

FR

- Boîtier et cadre en aluminium moulé
- Prétraité avant d'être recouvert d'un revêtement en poudre, ce qui lui confère une grande résistance à la corrosion.
- Entrée de câble unique
- Vis en acier inoxydable 304, Enduit de zinc lamellaire (ZFC)
- Joint en caoutchouc silicone durable
- Verre trempé transparent
- Le pilote distant (inclus) n'est pas classé IP
- Résistance au feu 30 ou 60 minutes
- 0dB acoustique évalué

ES

- Carcasa y marco de aluminio fundido a presión
- Pretratada antes del recubrimiento en polvo para garantizar una alta resistencia a la corrosión
- Entrada de un solo cable
- Sujetadores de acero inoxidable grado 304, Recubierto de escamas de zinc (ZFC)
- Junta de goma de silicona duradera
- Vidrio templado transparente
- El controlador remoto (incluido) no tiene clasificación IP
- Resistencia al fuego de 30 o 60 minutos
- Clasificación acústica de 0 dB.

Feature symbols

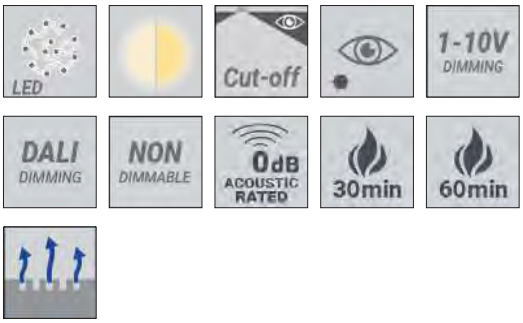

Light symbols



MUNICH

Product code guide

MUN-80001 - N - 8040 - ND - 05

- N: Optic
- 8040: CCT / CRI
- ND: Dimming type
- 05: Product colour

CCT / CRI
8030 – 3000K CRI80
8040 – 4000K CRI80

Dimming type
ND – On/Off
DI – 1-10V
DA – DALI

Product colour
01 – Black
03 – White
05 – Matt Silver

	Product code	Light source	Power	Lumen	Weight	Optic				CCT / CRI	Dimming type
						N	M	W	VW		
MUNICH 1	**MUN-80001**	7 LED (N,M), 1 LED (W,VW)	12 W	509 - 1038 lm	0.40 kg	14°	25°	34°	60°	8030 I 8040	ND I DI I DA



DALI Control System Page 784



MUNICH 1

